

**CLIPSAL**<sup>®</sup>

by Schneider Electric

## 360° Infrascan - Zone Mask 753MASK



**INFRASCAN**<sup>®</sup>  
PASSIVE INFRARED SENSOR

Installation Instructions

### Diagram of Parts

Suitable for use with the following products:

- 753
- 753R
- 5753L
- 5753PIERL

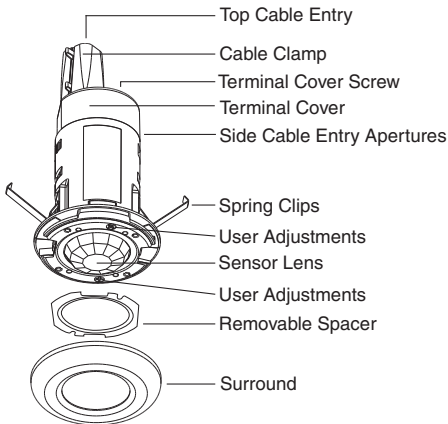

ZONE MASK

753 SERIES SENSOR

The Clipsal 360° Infrascan Zone Mask is designed to block the unit from detecting motion in unwanted trip areas. This might include a smaller office space with an open doorway, where it is not desirable to activate lighting when people pass by the open door.

## Fitting of Zone Mask


The Zone Mask incorporates a series of staged 'tear-away' sections, allowing full customisation of the field of view. Tear away sections where you want detection to take place.

To fit the Zone Mask, remove the surround, and unclip the removable spacer. Clip the Zone Mask in place, and replace the surround.

Additional Zone Masks are available, Clipsal Catalogue Number 753MASK.


### Typical Examples

#### 1. No Zone Mask fitted.





Range 14m diameter  
approximately circular  
(maximum range).

#### 2. Full Zone Mask fitted.




Range 4m diameter  
approximately circular.


### 753 Series Sensor Effective Field of View

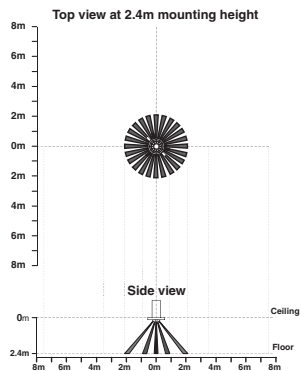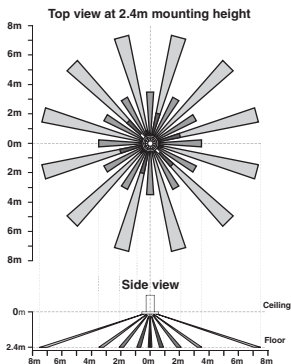

### 3. Partial Zone Mask fitted.




Range 7m diameter  
approximately circular.


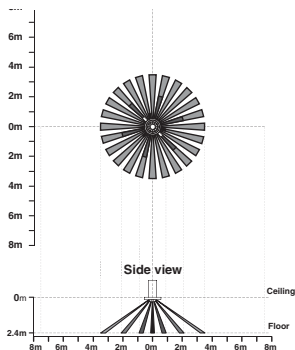


### 4. Fully Customised Field of View.

This example illustrates the suggested use of the Zone Mask to prevent unwanted tripping in a smaller sized office with an open doorway.

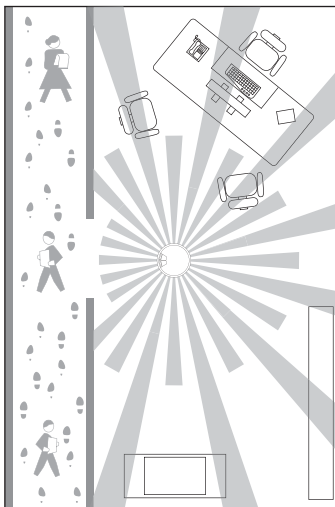



Top view at 2.4m mounting height



Range 14m diameter, approximately  
circular. Wedge shaped exclusion  
zone blocked out by mask.

## 5. Other Detection Patterns.

Open plan office space with dividing partiton separating high traffic area.

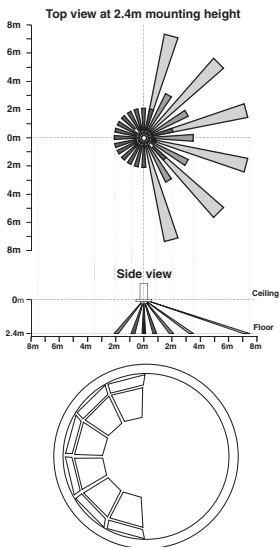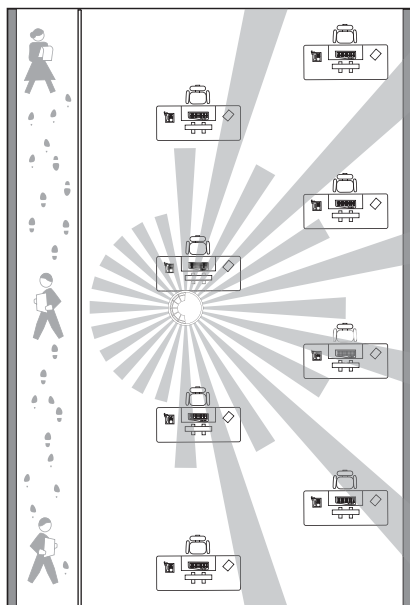

Range 2m and 14m,  
approximately semi-circular  
detection pattern.

**Clipsal Australia Pty Ltd**

A member of Schneider Electric

**clipsal.com**

Contact us: [clipsal.com/feedback](http://clipsal.com/feedback)

National Customer Care Enquiries:

**Tel 1300 2025 25 Fax 1300 2025 56**

Clipsal Australia Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© Clipsal Australia Pty Ltd. The identified trademarks and copyrights are the property of Clipsal Australia Pty Ltd unless otherwise noted.

F1853/03

CLIPCOM 19543 June 2009