
Just because you are outside doesn't mean you have to suffer inferior quality sound. Krix's range of outdoor loudspeakers are fully weatherproof and meet IP standard 54 for dust and moisture resistance. Whether you are using them in commercial applications of beside the pool at home, Krix's outdoor speakers will deliver...come rain, hail or shine.





tropix

experience the great outdoors

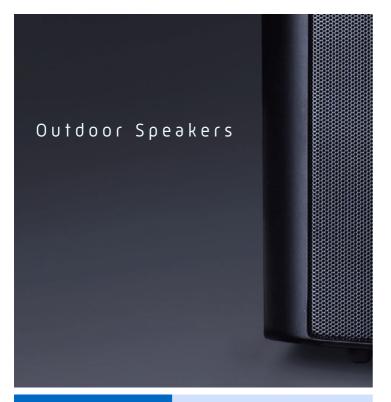

The Tropix build on the benchmark set down by the Aquatix waterproof outdoor design. Using a larger enclosure, bass driver and tweeter, the Tropix deliver more effortless bass energy in larger outdoor environments. Maintaining the same cabinet styling and attention to detail within the construction of this all weather enclosure, the Tropix make dining in the great outdoors a memorable experience

Frequency Range	55Hz - 20kHz on wall response
Power Handling	Maximum 110 watts RMS amplifier power.
	Polyswitch protection has been installed for
	the tweeter
Sensitivity	87dB for 2.83 volts at 1 metre
Configuration	61/2 inch 2-way
Bass Driver	Nominal 165mm (61/2") polypropylene
	cone with rubber surround. 25mm (1") high
	temperature voice coil wound on a radial
	vented kapton former and copper shorting
	ring for lower distortion.
Tweeter	26mm (1") specially damped mylar dome
	with phase plug. Ferro fluid cooled
Crossover Point	2.4kHz
Impedance	Nominally 8 ohms
Enclosure Type	Sealed and gasketed waterproof trapezoid
	enclosure with internal bracing. Injection
	moulded with UV stabilizing
Dimensions	305mm high x 220mm wide x 225mm deep
Finish	Painted satin white or black
Input terminals	5 way hand tightened binding posts,
	nickel plated
Weight	3.5kg each including bracket
Mounting	Adjustable 'U' shaped aluminium bracket
NB: Image shows logo ba	edge with vertical orientation.

NB: Image shows logo badge with vertical orientation. Product is supplied with horizontal orientation as standard.

